



Hurricane 20L & 40L Waterproof Backpack/Tail Pack

SE-3020
SE-3040


Please read instructions carefully before installation. We recommend this product be installed by a qualified and experienced technician. If you are unsure of any of the below directions and or your ability to correctly and securely install this product, please contact us or your local dealer for help. Below diagrams show typical installation. Your vehicle may be different so please use diagrams as a guide. Make sure your vehicle is clean and free from dirt, road grime, etc. where the this product mounts. It is the riders responsibility to make sure the product is mounted and secure before each use. Loading the bag may result in a change of position, always check for proper mounting position after loading and before each and every ride.

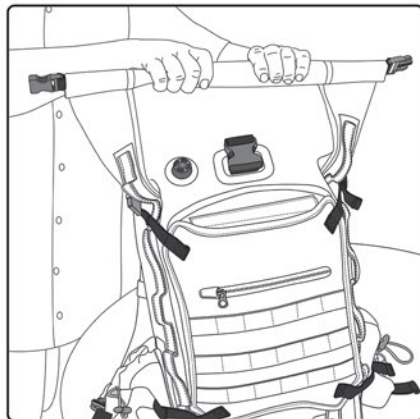


Place your contents inside the waterproof bag. Place heavier items lower in the bag to balance the load better. Roll down the top minimum of 3 times.

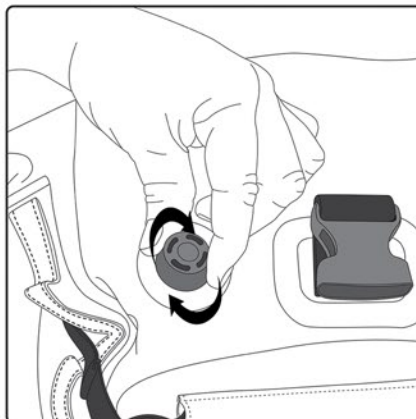


On the front of the bag there is a waterproof purge valve which allows the air to escape and makes for better compression. Simply turn the valve a 1/4 turn to the left to open and push out the air. Be sure to close when done and not over tighten.

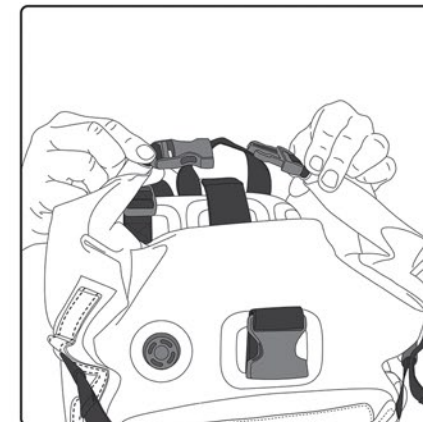


Once the top has been rolled down to your desired size, you can choose from two different closure methods. 1) connect the male and female buckle on either side of the opening like above. Then connect the large buckle over the rolled top to hold in place. Or see next step

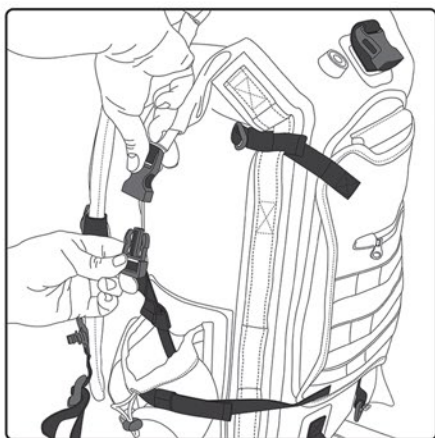

2) Connect the male and female buckles at the opening to the side buckles located inside the bottle holders on each side of the bag. Pull straps to adjust. Then connect the large buckle over the rolled top to hold in place.

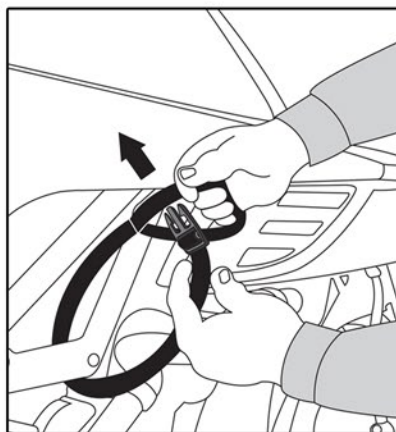

To mount the bag as a tail pack, using one of the two supplies straps with a buckle on one side and loop on the opposite side and pass the loop around a part of the frame or rack. Then push the buckle through the loop creating a noose and pull to securely attach, as per the above images. Repeat again for second quick-release straps.

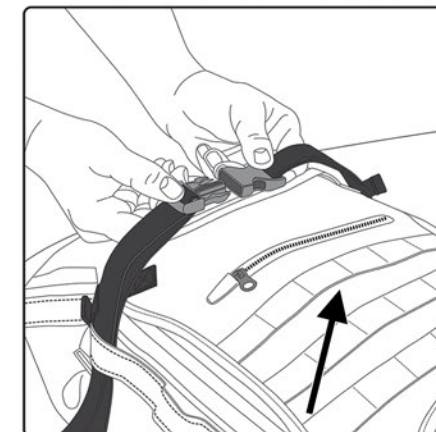

Once all 4 straps are attached to the bike, place the bag on the seat or tail section. Make sure the backpack/removable waist straps are tucked securely under the bag and not loose or hanging. Insert each strap through the webbing loops sewn on each side of the bag and connect buckles together. Pull straps tight to secure.

Warning

Read the installation instructions and make yourself familiar with the process of installing the Rigg Gear product(s) on your vehicle. It is your responsibility to install the product(s) correctly and securely as outlined in these instructions. Rigg Gear products must not be overloaded or over tightened. Failure to adhere to these warnings may result in, but not limited to, the product becoming detached, becoming tangled in moving parts of the vehicle, unstable vehicle dynamics, reduction in the ability to control the vehicle. The result(s) could lead to serious injury.

Always drive safely. Always wear a helmet and protective apparel.

3518-A Lake Center Dr Santa Ana, CA 92704
Tel (714)850-1811 Fax (714)850-1848
e-mail: info@RiggGear.com www.RiggGear.com

RIGG GEAR
ADVENTURE