



Please read instructions carefully before installation. We recommend this product be installed by a qualified, and experienced motorcycle technician. If you are unsure of any of the below directions and or your ability to correctly and securely install this product, please contact us or your local dealer for help. Below diagrams show typical installation, your motorcycle may be different so please use diagrams as a guide. Make sure your motorcycle is clean and free from dirt, road grime etc. where the Nelson-Rigg® luggage mounts.




With bag sitting on a luggage rack or passenger seat, loosen Velcro® straps. With strap passing through "D" ring, slide over your backrest using as many straps as your backrest size will accommodate. Pull to tighten and lay the strap back onto itself, fastening with Velcro®.

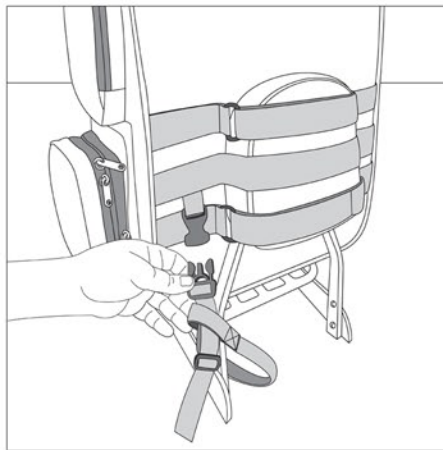


Take the side straps with male buckle on one end and loop on the other and loop it around the backrest, luggage rack or secure body part. Pass the male buckle through the loop creating a noose before re-attaching to the bag.

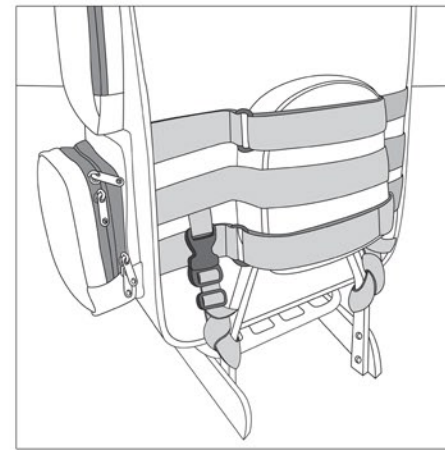

Adjust strap and tighten. Make sure bag is secure with little if any motion up and down or left to right. If the Velcro® straps are not long enough to go around your backrest, visit our website for strap extensions. These will make the existing straps longer to accommodate wider and thicker backrests.

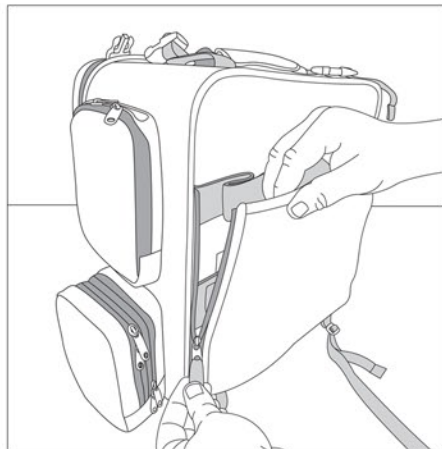


If your backrest design and size allows, zip the vanity cover in place to cover the mounting straps. If the cover is not big enough to go around your backrest, visit our website for a cover extension to accommodate wider and thicker backrests.

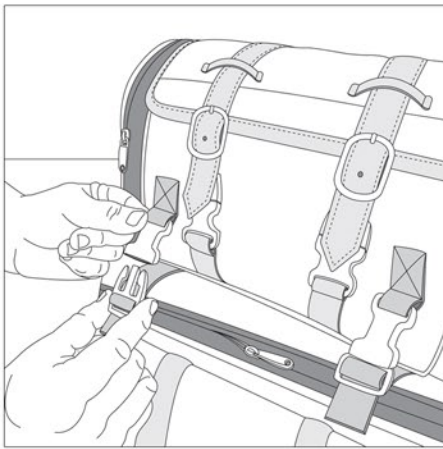

Place the \*roll bag on top of the main bag making sure the bag is centered and laying flat. Using the straps with male buckles on top of the main bag, connect to the female buckles on the roll bag. Once all 4 are connected, adjust for a snug fit.

\* Roll bag included with CTB-1000 only

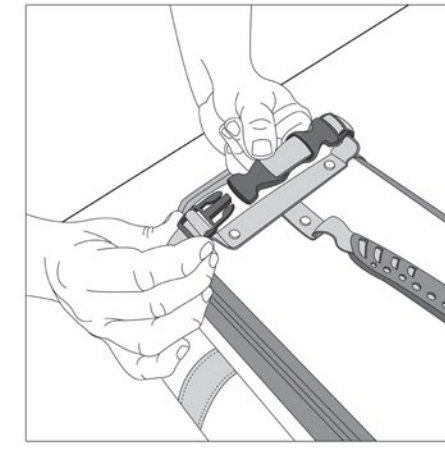

When not using a roll bag, use the supplied connector with dual female buckles to secure the roll bag mounting straps. You can also use these straps to secure other items such as jackets, blankets, tents and other low profile items. When closing zippers on main bag, always end the location of pullers at the lowest point of bag to ensure they will not open while riding. Using the included combination lock with also keep the zippers closed and secure.

### Warning:

Read the installation instructions and make yourself familiar with the process of installing the Nelson-Rigg® product(s) on your bike. It is your responsibility to mount the product correctly and securely as outlined in these instructions. Nelson-Rigg® products are intended for use at USA street legal speeds as posted by the individual States. Nelson-Rigg® luggage must not be overloaded. Max carrying capacity is 10 lbs per bag or the maximum load suggested by the manufacturer of the vehicle, whichever is less.

Failure to adhere to these warnings may result in, but not be limited to: the luggage becoming detached, the product becoming tangled in moving parts of the vehicle, unstable vehicle dynamics, reduction in the ability to control the vehicle. The result(s) of could lead to serious injury.

**Always ride safely, adhering to the local highway regulations. Always wear a helmet and protective apparel.**

3518-A Lake Center Dr Santa Ana, CA 92704  
 Tel (714)850-1811 Fax (714)850-1848  
 e-mail: [info@nelsonrigg.com](mailto:info@nelsonrigg.com) [www.nelsonrigg.com](http://www.nelsonrigg.com)

